


Concrete spraying equipment

Wetkret 3

Compact crawler carrier
Optional platform tilting system



Note: This is a merely informative, non-binding document. Maximum theoretical values listed. Specifications are subject to change without prior notice. Photos and drawings are for illustrative purposes only. For available options, please consult the factory.

Standard equipment

Telescopic spraying arm Putzmeister SA 9.1		
Max. spraying reach (vertical/horizontal)	m	8.79 / 7
Number of arm extensions		3 (2 telescopic)
Telescopic stroke	m	2.7
Number of axles		6
Max. arm angle	°	+65 / -40
Working lights (x2 LED)	W	41

Spraying head		
Rotation	°	360
Inclination	°	+/- 120
Nutation	°	10
Nozzle	DN	40

Remote control		
Dual radio / cable	m	15

Diesel engine (two options)		
EU-Stage IIIA	kW (HP)	19.7 (25)
EU-Stage V	kW (HP)	18.4 (24)

Dual drive system		
Electric	kW	11

Diesel		Diesel engine
--------	--	---------------

Crawler carrier		
Weight (without/with load)	kg	5,000 / 5,500
Maximum climbing capacity at full load (longitudinal/ trasversal)	%	57 / 17
Transmission		Hydrostatic
Maximum speed	km/h	3.6
Driving		2 speed
Steering		2 rubber crawlers
Parking break (negative)		Automatic
Driving lights (x4)	W	35
Electric equipment (x2 batteries)	V / Ah	12 / 77
Oil tank	l	235
Diesel tank	l	65
Support legs		



Supply values		
Max. concrete flow	m³/h	20
Max. pressure on concrete	bar	65
Hose's diameter	mm	65
Max. aggregate size	mm	16
Max. air flow	m³/min	10
Max. air pressure	bar	8

Optional equipment


Platform tilting system			
Drive		Hydraulic	
Slope	°	+/- 30	
Rear blade-type stabilizer			
Mandatory for working in upslopes with more than of 10° longitudinal gradient			
Winch (two options)		Steel cable	Synthetic cable
Load	kg	6,800	7,300
Cable length	m	50	50
Mandatory for working in downslopes with more than of 10° longitudinal gradient together with the platform tilting system			
Fire suppression system			
ANSUL		Automatic	
DAFO		Automatic	

Additive system		
Type		Hydraulic DL18
Adjustment range	l/h	60-500
Max. pressure	bar	10
Tank	l	180
Cable reel		
Drive		Manual
Cable length	m	45
Others		
Spraying head's kit (black-white, without proporcionality)		
Bio hydraulic oil with filter and breather		
Conexion kit with Putzmeister concrete pump		


Climbing capacity

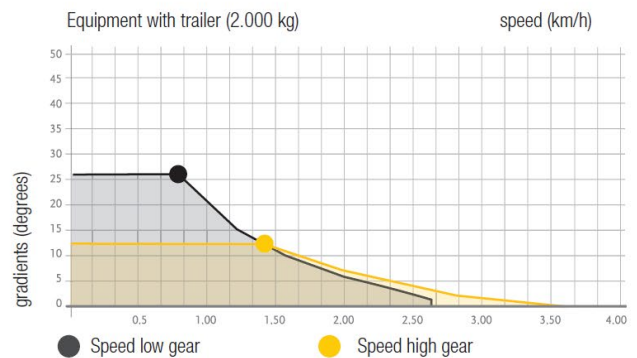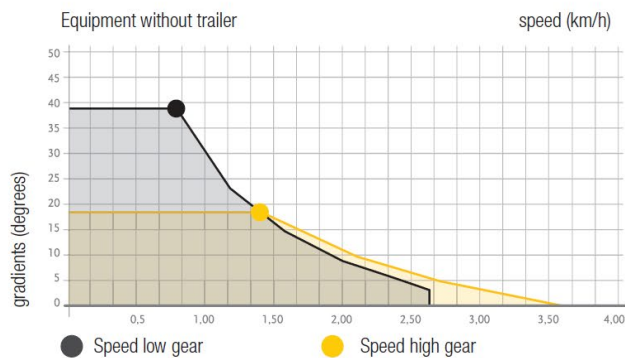

Spraying arm reach diagrams

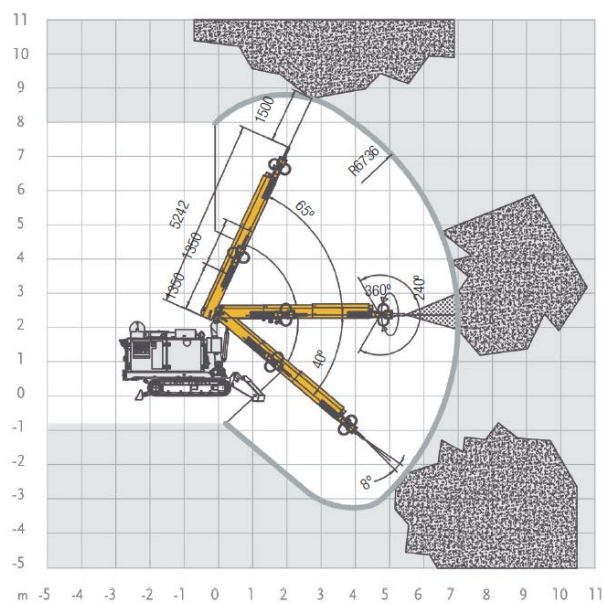

Vertical spraying reach

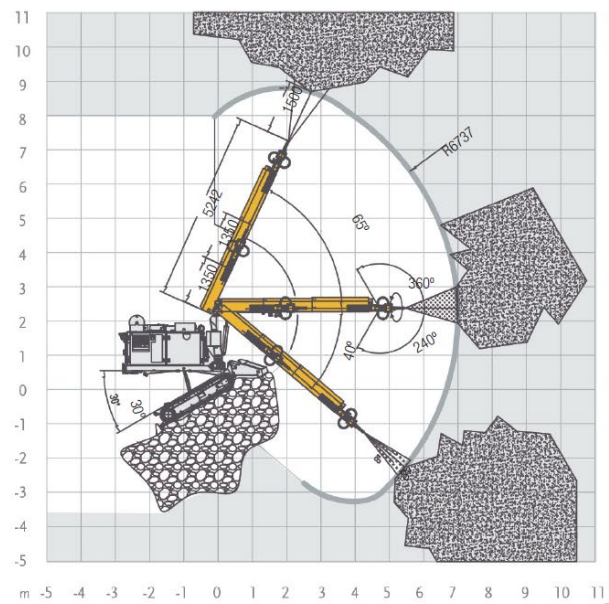

Vertical spraying reach with front tilting